



amtico click smart



An Introduction to **Click Smart**

Amtico Click Smart is a simple, straight-forward and versatile click-vinyl that's easy and quick to install. There's no need to use adhesive, making it a really appealing option.

There's no compromise on style either. With an authentic range of wood and stone effect products to choose from, a beautiful floor is just a few clicks away.

Amtico Click Smart

Contents:

Why Choose Amtico Click Smart - 4
Wood - 6
Stone - 12
Product Information - 18
Installation - 20
Technical Specification - 22
Looking after your floor - 23



*Wear-out only. For full warranty details please visit amtico.com

Right: New England Oak - SB5W2527





Why Choose Click Smart?

Our Click Smart LVT flooring product is integrated with underlay so there's no separate application making it quicker to install than other click LVT products.

High Density Wear Layer

- withstands wear and tear and provides impact resistance.

Urethane Coating - surface protection making it scuff and stain resistant.

Backing Layers - provide stability and acoustic benefits - the underlay is included here.

Rigid Core Layer - contains up to 20% recycled content and covers subfloor imperfections.

Fibreglass Reinforcement - this provides the product with dimensional stability.

Aesthetic Layer - our beautiful and realistic wood and stone design print films.

Core Layer - the base for the aesthetic layer.

- With the latest rigid core technology, Click Smart is 100% waterproof and allows for easy installation over existing hard floors.
- Our backing layers provide a 20dB acoustic rating reducing impact sound insulation and providing an extra level of comfort underfoot.
- Compatible with underfloor heating.
- Low maintenance - easy to clean and look after.

- Durable - perfect for homes with kids and pets.
- Softer underfoot compared to Wood and Ceramic flooring.
- No need for adhesives - easy to fit click - locking mechanism

Right: Wave Slate Black - SB5S2602





Whatever your taste and design style, Amtico Click Smart has an authentic looking wooden flooring solution you'll love.



Wood



Why we love wood...

Perfect for either traditional or contemporary homes, there's an Amtico Click Smart wood flooring for everyone. From deep, dark, dusky shades to bright and pale oak, the colour palette is on-trend and versatile.

Left: White Ash - SB5W2540

Above: Dusky Walnut - SB5W2542




Perfect for...

Creating a simple and elegant finish, light woods work well in contemporary or traditional schemes. In a large space, pair light wood against darker walls or surfaces for a feeling of natural continuity which doesn't look too stark. When used in smaller rooms, light wood will really help to open up the space.

For a traditional finish, try Honey Oak or New England Oak to bring a charm to the space.

Lovely Lights



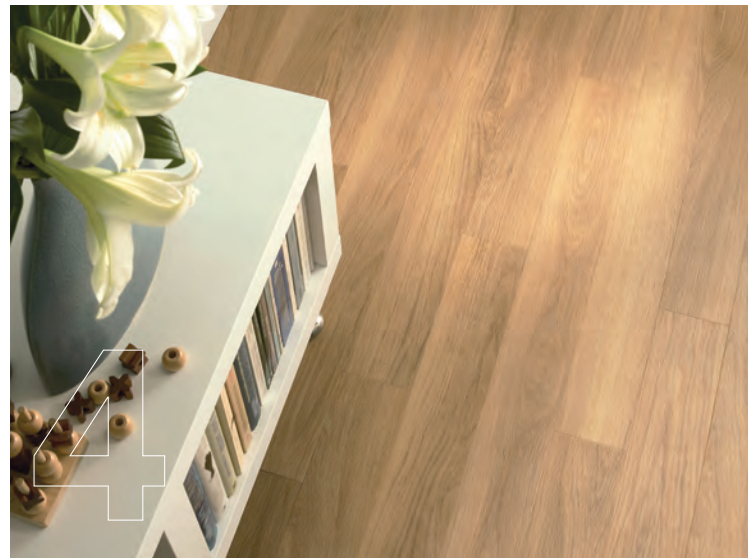

1. Featured Oak - SB5W2533
Tick Grain finish

2. New England Oak - SB5W2527
Tick Grain finish

3. Sun Bleached Oak - SB5W2531
Barnwood finish

4. Honey Oak - SB5W2504
Tick Grain finish





Perfect for...

Bringing a touch of classic elegance, whether smooth and glossy or textured and rustic. While darks may seem the obvious choice for large spaces, they bring cosiness and depth to smaller spaces.

Warm darks such as Black Walnut bring a contemporary and clean finish, whereas the authentic, country finish of Dry Cedar adds artisan charm.

Classic Darks



5. Nordic Oak - SB5W2550
Tick Grain finish

6. Black Walnut - SB5W2534
Tick Grain finish

7. Chapel Oak - SB5W3014
Barnwood finish

8. Dry Cedar - SB5W2535
Barnwood finish





Stunning stone
flooring for the perfect
contemporary finish.



Stone




Why we love stone...

With its effortless style and contemporary finish, stone remains a popular choice for flooring. From a rugged travertine finish to a smooth, sleek slate, easy-to-fit Click Smart has something for everyone.

Left: Ceramic Ecu - SB5S3592

Above: Wave Slate Black - SB5S2602

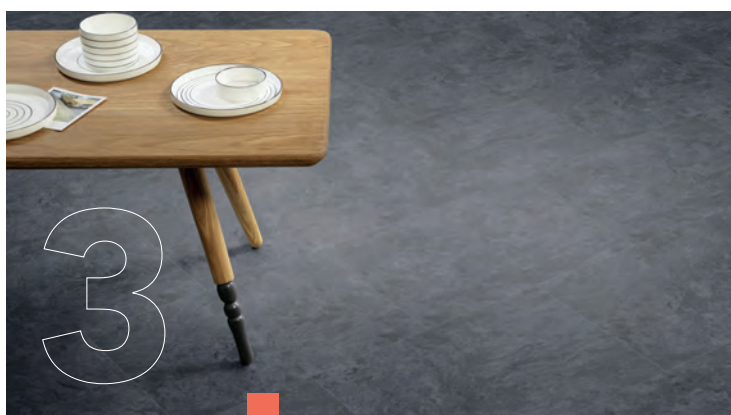

Simple Stones

Our favourite stones...

The soft stone tones of Ceramic Ecru and Crema Travertine are our favourite ways to light up a floor.

Bring the dark force home with Wave Slate Black and Monmouth Slate for a sleek and stylish finish.

1. Ceramic Ecru - SB5S3592
Deep Ceramic finish

2. Wave Slate Black - SB5S2602
Riven finish

3. Monmouth Slate - SB5S7501
Riven finish

4. Crema Travertine - SB5S1589
Riven finish





A real classic...

Fresh, light and bright, these ever-popular floors are timeless and versatile. From the cool, contemporary finish of ceramics to the authentic, rustic appearance of travertine, these classic floors remain steadfast in their beauty and elegance.

The Classics



5. Ceramic Frost - SB5S6100
Deep Ceramic finish

6. Ceramic Ecu - SB5S3592
Deep Ceramic finish

7. Crema Travertine - SB5S1589
Riven finish

8. Noche Travertine - SB5S4590
Riven finish



Wood

Amtico Click Smart Woods are available in 178 x 1245mm (7 x 49") planks.
Visit [amtico.com](https://www.amtico.com) for detailed size availability.




White Ash - SB5W2540
Barnwood finish



Sun Bleached Oak - SB5W2531
Barnwood finish




Dry Cedar - SB5W2535
Barnwood finish

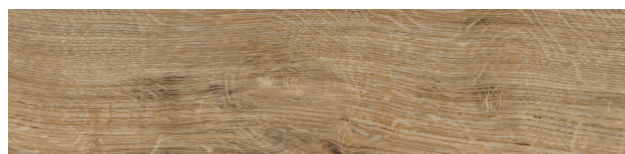

Featured Oak - SB5W2533
Tick Grain finish



Honey Oak - SB5W2504
Tick Grain finish

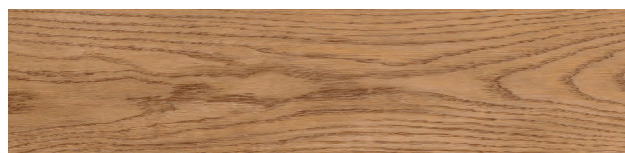


New England Oak - SB5W2527
Tick Grain finish




Nordic Oak - SB5W2550
Tick Grain finish



Dusky Walnut - SB5W2542
Tick Grain finish

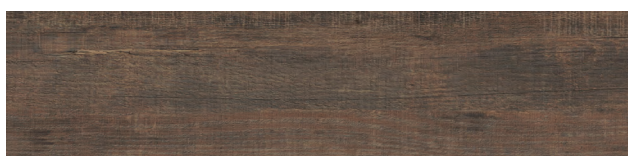

Chapel Oak - SB5W3014
Barnwood finish

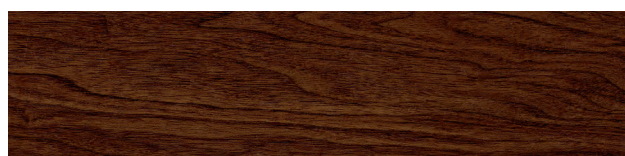

Black Walnut - SB5W2534
Tick Grain finish

Stone

Amtico Click Smart Stones are available in 303 x 607mm (12 x 24") tiles.
Visit [amtico.com](https://www.amtico.com) for detailed size availability.



Ceramic Frost - SB5S6100
Deep Ceramic finish




Ceramic Ecru - SB5S3592
Deep Ceramic finish




Crema Travertine - SB5S1589
Riven finish



Noche Travertine - SB5S4590
Riven finish

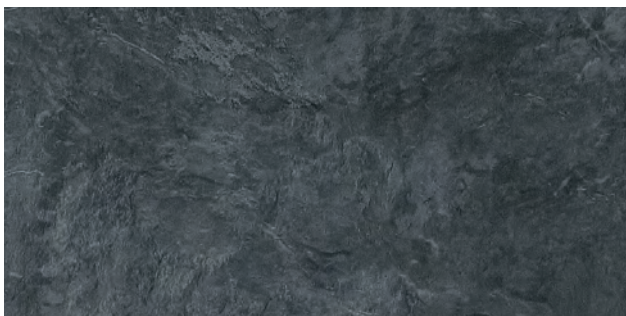

Monmouth Slate - SB5S7501
Riven finish

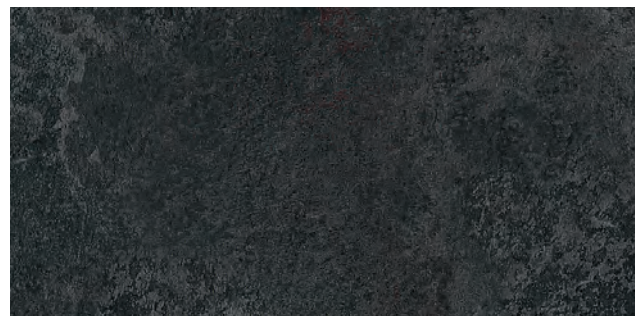

Wave Slate Black - SB5S2602
Riven finish

Installation

Before You Begin

Amtico Click Smart is suitable for use in interior residential areas, including kitchens, hallways, living spaces and bathrooms, but not recommended in conservatories or unheated areas. It can be fitted onto all existing hard floor coverings and on to subfloors that are smooth, hard and flat.

The flooring should be the last thing installed into the room and after all other works and installation of fitted units, avoiding the risk of accidental damage.

This product is extremely stable however, we do require expansion gaps at the perimeter of the room and around all fixed objects. For rooms up to 10m length this gap should be at least 2mm and can be concealed with the skirting or with a cover trim. For rooms 10-20m in length this should be increased to 5mm on all sides. Expansion gaps must be allowed at all doorways.

It is suitable for use with electric and water underfloor heating systems (surface floor temperature should be regulated to 27°C max), and can be installed onto damp floors at up to 95% humidity.

Always store the boxes of product flat, and leave them in the room to be fitted for 24 hours to acclimatise to the temperature of installation (18-25°C). If tiles have been stored within this temperature range acclimatisation time can be reduced.

Preparation

Amtico Click Smart can be installed over any existing hard floor surfaces, such as ceramic, vinyl and linoleum provided that it is in a reasonable condition and provides a smooth and level base without undulations. Carpet or damaged floorcoverings should be removed.

Ensure the floor is level; any roughness, height changes or deep grout lines should be smoothed using a levelling compound to ensure a good finish.

In cases of doubt of subfloor suitability please contact a flooring professional or Amtico directly.

Receiving And Setting Out Your Floor


Check the style, colour, quantity of product and inspect for any damage. Installation of flooring implies acceptance of materials.

For a professional appearance a floor should be balanced with even cuts at the edge of a room. This can be done by measuring the width of the room and working out how many full tiles are needed; the remaining measure can be balanced at either end. It is recommended that these cuts are not too small. If so reduce the number of full tiles by one to give a larger cut tile. We suggest 20-30% of a full tile is the smallest cut.


The tiles should be set out using the plans on the opposite page for best appearance and stability.

Recommended Tools

- Rubber mallet, pull bar, spacers, laminate cutter, Jigsaw (utility knife or flooring guillotine can also be used).
- Amtico Click Smart is a tough product. Tiles can be cut with a laminate cutter or a jigsaw fitted with fine tooth blades, which is especially useful for intricate cuts.
- Tiles can also be cut using a sharp knife and a metal rule. Carefully score several times, and the tile can then be snapped with two hands, the underlay backing will need to be cut through.




Wood effect: Tiles should be fitted with random staggered joints with a minimum 200mm between short ends.




Stone effect: Tiles should be fitted in a brick pattern.

Finishing The Room




A trim can be affixed to cover the expansion gap.



Skirtings can be used to cover the expansion gap and doorframes can be undercut before installation to the correct depth to enable a neat finish.

Uninstallation


Detach the whole row that contains the unwanted tile(s). Always slide the end joints apart horizontally if uninstalling any tiles, pulling them apart in any other way will damage the mechanism.

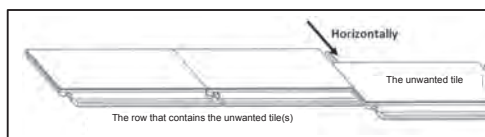

Repairs


In cases of damage during the life of the floor, repairs can either be made by taking product up from the wall, or alternatively individual tiles can be replaced without removing the entire floor by cutting out the damaged tile. Please consult Technical Services 02476 861409 for more details.

Installation




Step 1

The first row of tiles should be placed against the wall with the tongue nearest the wall working from left to right, cutting tiles to the correct width if required.




Step 2

The second tile should be aligned above and tapped into place with a mallet. Level end joints indicate tiles are correctly connected. Care should be taken to make sure they are exactly aligned and that spacers are used to allow expansion space.




Step 3

Continue to fit this row in the same manner, cutting the last tile to size allowing the required expansion gap.




Step 4

To begin the second row, cut the tile to the required length, angle the tongue of the new tile into the groove of the already fitted tile and lower into place, while maintaining the layout illustrated previously.




Step 5

The next tile should be inserted at an angle, closely touching the previous tile in the row then lowered into position. The end joint should be firmly tapped with a rubber mallet to lock it into place.




Step 6

If necessary use a tile offcut as a tapping block, gently tap with a rubber mallet to ensure edges are well aligned.



Step 7

Continue fitting full rows in this manner, keeping joints correctly aligned and ensuring the tiles are all properly connected. The last row of tiles should be cut to size, allowing the correct expansion gap and fitted in the same manner.



Step 8

A pull bar can be useful for this final row of tiles.



Technical Specification

Click Smart: Wood						Size (Straight Grain)	
Product Name	Product Code	Surface Finish	Bevel	Tile Thickness (mm)	Wear Layer Thickness (mm)	178 x 1245mm / 7 x 49"	303 x 607mm / 12 x 24"
White Ash	SB5W2540	Barnwood	Y	6.0	0.55	Y	
Sun Bleached Oak	SB5W2531	Barnwood	Y	6.0	0.55	Y	
Dry Cedar	SB5W2535	Barnwood	Y	6.0	0.55	Y	
Featured Oak	SB5W2533	Tick Grain	Y	6.0	0.55	Y	
Honey Oak	SB5W2504	Tick Grain	Y	6.0	0.55	Y	
New England Oak	SB5W2527	Tick Grain	Y	6.0	0.55	Y	
Nordic Oak	SB5W2550	Tick Grain	Y	6.0	0.55	Y	
Dusky Walnut	SB5W2542	Tick Grain	Y	6.0	0.55	Y	
Chapel Oak	SB5W3014	Barnwood	Y	6.0	0.55	Y	
Black Walnut	SB5W2534	Tick Grain	Y	6.0	0.55	Y	

Click Smart: Stone						Size (Straight Grain)	
Product Name	Product Code	Surface Finish	Bevel	Tile Thickness (mm)	Wear Layer Thickness (mm)	178 x 1245mm / 7 x 49"	303 x 607mm / 12 x 24"
Ceramic Frost	SB5S6100	Deep Ceramic	Y	6.0	0.55		Y
Ceramic Ecru	SB5S3592	Deep Ceramic	Y	6.0	0.55		Y
Crema Travertine	SB5S1589	Riven	Y	6.0	0.55		Y
Noche Travertine	SB5S4590	Riven	Y	6.0	0.55		Y
Monmouth Slate	SB5S7501	Riven	Y	6.0	0.55		Y
Wave Slate Black	SB5S2602	Riven	Y	6.0	0.55		Y

Looking After Your Floor

Avoid using aerosol sprays and other silicone based products, as overspray can leave a residue and make the floor slippery.

Use Amtico Entrance Matting at all external doorways. This will help reduce the chance of water, excess grit, dirt, small stones and other debris being walked onto the floor. Some rubber backed matting can cause permanent staining.

Spillages should be wiped up immediately. Residues of oils and greases are potential slip hazards. The affected area should be thoroughly cleaned with Amtico FloorCare Maintainer, or our ready to use Amtico FloorCare Spillage Remover.

Avoid contact with rubber, asphalt, some paints and shoe polishes, which can potentially stain your floor.

Do not allow cigarettes, matches or other hot items to be deposited on the floor as permanent damage is likely to occur.

Amtico floors have good scratch resistance properties. However, sharp edges on some items of furniture can damage the floor and care should be taken when using vacuum cleaners as they may scratch your floor.

The use of furniture cups, felt pads or glides is essential to help reduce the risk of scratching your floor.

Do not drag heavy items of furniture across the floor as this can result in serious scratch marks. Care should be taken with a brand new floor when furniture and other appliances are being fitted or placed back into the space.

Castors, furniture cups and other means of load spreading will help reduce the risk of indentation to the floor when used under heavy load bearing furniture and appliances.

Do not use steam mops as these may damage the planks and tiles.

Routine Cleaning

Amtico FloorCare Maintainer

Our concentrated cleaner, with a fresh, citrus aroma for routine cleaning.

Amtico FloorCare Spillage Remover

A ready to use cleaner with a citrus aroma. Formulated for the convenient removal of spills and other deposits.

We do not advocate the use of other cleaning products, as they may not work as efficiently or effectively and may cause damage to the floor or leave the surface with a slippery residue.

Amtico Wear & Care Starter Pack

Ask your retailer about our Wear & Care kit which contains everything you need to look after your floor -

Maintainer

1 x 1 litre (1000ml) bottle

Spillage Remover

1 x 0.5 litre (500ml) spray bottle

Furniture Felt Pads

1 x pack, mixed sizes

Cleaning Pad

1 x red nylon non-abrasive pad

Wear & Care Leaflet





Amtico International, UK & European Sales
Solar Park, Southside, Solihull, West Midlands B90 4SH.
+44 (0) 121 745 0800. samples@amtico.com

amtico